


GLENTEK GMB5600 BRUSHLESS SERVO MOTOR DIMENSIONS

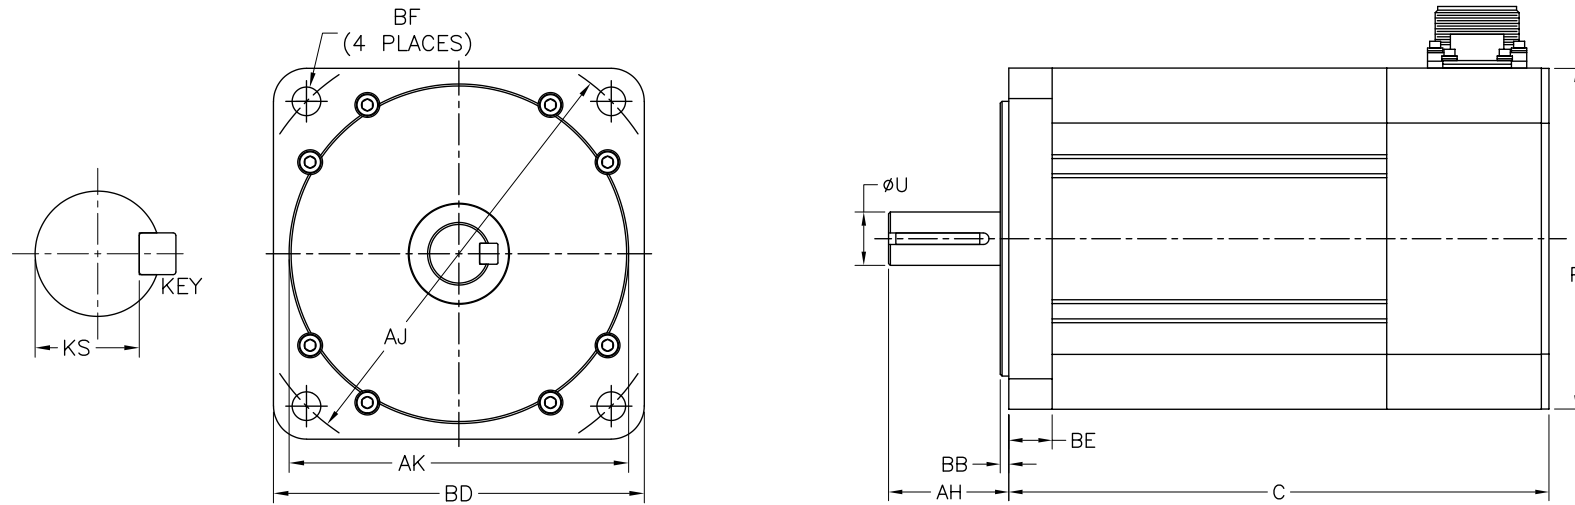

	Model Number	Kg (lbs.)	C (max)	P (max)	Shaft				Flange/Face				Mounting Hole		
					AH	U	KEY	KS	AK	BB	BD	BE	AJ	BF Ø	Tap
METRIC - mm (inches)	GMB5627-XXX-M	15.0 (33.0)	255.0 (10.0)	142.0 (5.59)	50.00 (1.97)	24.00 (0.945)	M8 X M7 X 38	19.8 - 20.0	130.00 (5.118)	3.60 (0.142)	142.00 (5.59)	20.1 (0.79)	165.00 (6.496)	11.00 (0.433)	THRU
	GMB5654-XXX-M	22.7 (49.9)	332.0 (13.1)	142.0 (5.59)	50.00 (1.97)	24.00 (0.945)	M8 X M7 X 38	19.8 - 20.0	130.00 (5.118)	3.60 (0.142)	142.00 (5.59)	20.1 (0.79)	165.00 (6.496)	11.00 (0.433)	THRU
	GMB5681-XXX-M	30.4 (66.9)	408.0 (16.1)	142.0 (5.59)	50.00 (1.97)	32.00 (1.260)	M10XM8 X 36	26.8 - 27.0	130.00 (5.118)	3.60 (0.142)	142.00 (5.59)	20.1 (0.79)	165.00 (6.496)	11.00 (0.433)	THRU
	GMB56108-XXX-M	38.6 (84.9)	484.1 (19.1)	142.0 (5.59)	50.00 (1.97)	32.00 (1.260)	M10XM8 X 36	26.8 - 27.0	130.00 (5.118)	3.60 (0.142)	142.00 (5.59)	20.1 (0.79)	165.00 (6.496)	11.00 (0.433)	THRU
ENGLISH - inches (mm)	GMB5627-XXX-E	33.0 (15.0)	10.06 (255.5)	5.59 (142.0)	1.97 (50.0)	0.875 (22.23)	.188 SQ. X 1.50	.761 - .771	4.500 (114.30)	0.140 (3.56)	5.59 (142.0)	0.81 (20.57)	5.875 (149.23)		3/8-16 THRU
	GMB5654-XXX-E	50.0 (22.7)	13.06 (331.7)	5.59 (142.0)	1.97 (50.0)	0.875 (22.23)	.188 SQ. X 1.50	.761 - .771	4.500 (114.30)	0.140 (3.56)	5.59 (142.0)	0.81 (20.57)	5.875 (149.23)		3/8-16 THRU
	GMB5681-XXX-E	67.0 (30.4)	16.06 (407.9)	5.59 (142.0)	1.97 (50.0)	1.250 (31.75)	.250 SQ. X 1.50	1.102 - 1.112	4.500 (114.30)	0.140 (3.56)	5.59 (142.0)	0.81 (20.57)	5.875 (149.23)		3/8-16 THRU
	GMB56108-XXX-E	85.0 (38.6)	19.06 (484.1)	5.59 (142.0)	1.97 (50.0)	1.250 (31.75)	.250 SQ. X 1.50	1.102 - 1.112	4.500 (114.30)	0.140 (3.56)	5.59 (142.0)	0.81 (20.57)	5.875 (149.23)		3/8-16 THRU

NOTE: Metric and English motors are different models with differing dimensions.