

GLENTEK BRUSHLESS SERVO MOTORS GMBF4300 SERIES

Revision: 2/23/26



Glentek's GMBF4300 series of high performance, permanent magnet Brushless servo motors utilize traditional ferrite magnets which are ideal for cost sensitive applications. This helps to reduce the mechanical shaft resonance which allows higher servo gains with increased stability. In addition, all frame sizes incorporate skewed stators which provide ultra smooth operation (i.e. low cogging torque) at all speeds.

- Continuous Torque Range:
22.0 Lb-in (2.49 Nm) to 46.0 Lb-in (5.20 Nm)
- Peak Torque Range:
66.0 Lb-in (7.47 Nm) to 138.0 Lb-in (15.60 Nm)

GMBF4300 SERIES FEATURES

Traditional ferrite magnet design, which are ideal for cost sensitive applications.

Special design provides ultra smooth operation (i.e. low cogging torque) at all speeds.

Worldwide standard mounting configurations are available (English, Metric, NEMA 42, and NEMA 56C).

Optional custom mounting configurations are available to meet virtually any requirement.

Normally closed thermal switch provides over temperature protection.

Encoder with commutation tracks, brushless resolvers or Hall sensors are standard feedback devices offered

Various electrical windings are available as standard to suit both low (120 VAC) and high (230 VAC) voltage drives in order to provide optimum speed and torque characteristics. Optional custom electrical windings are available.

Shaft Keyway.

Class H insulation standard.

Standard operating temperature is dependent on the feedback device installed. Motors with resolver feedback can be specially configured to operate down to -40°C.

Optional 24VDC holding brakes are available.

Constructed to withstand the toughest industrial environment with rugged, high performance bearings and TENV construction with IP65 sealing standard (shaft seal required for IP65 sealing).

RoHS compliant

CE marked.

UL Recognized Component for US and Canada.

GMBF4300 SERIES ENVIRONMENTAL CONDITIONS

Storage Temperature: -20°C to 70°C

Operating Temperature: Standard: -20°C to 40°C, without derating, derate torque 10% per 10°C above 40°C
Special: -40°C to 40°C, without derating, derate torque 10% per 10°C above 40°C

Humidity: 5% to 95% relative humidity, non-condensing

Altitude: Up to 1000m without derating, derate torque 10% per 1000m above 1000m




GMBF4300 SERIES SELECTION TABLE

K_t = Torque Constant • K_v = BEMF = V_{RMS} Phase-to-Phase/1000 RPM • R_A = Phase-to-Phase Resistance • L_A = Phase-to-Phase Inductance

Model Number	Power @ Rated Speed		Speed, RPM		Cont. Stall Rating			Peak Stall Rating			K_t		K_v	R_A	L_A	Rotor Inertia	
	HP	KW	Max	Rated	Lb-in	Nm	Amps	Lb-in	Nm	Amps	Lb-in/A	Nm/A	V	Ω	mH	Lb-in-sec ²	Kg-m ²
GMBF4320-25	0.89	0.67	4000	3200	22	2.49	7.5	66.0	7.47	22.5	2.94	0.33	26	1.1	8.4	0.0032	0.000362
GMBF4320-50	0.89	0.67	4000	3200	22	2.49	3.8	66.0	7.47	11.4	5.76	0.65	51	4.7	14.7	0.0032	0.000362
GMBF4320-75	0.56	0.42	2500	2000	22	2.49	2.6	66.0	7.47	7.8	8.47	0.96	75	11.0	39.5	0.0032	0.000362
GMBF4320-100	0.39	0.29	1800	1400	22	2.49	1.9	66.0	7.47	5.7	11.41	1.29	101	18.5	43.8	0.0032	0.000362
GMBF4340-25	1.46	1.09	4000	3200	36	4.07	12.3	108.0	12.21	36.9	2.94	0.33	26	0.4	5.2	0.0059	0.000667
GMBF4340-50	1.46	1.09	4000	3200	36	4.07	6.2	108.0	12.21	18.6	5.76	0.65	51	2.1	14	0.0059	0.000667
GMBF4340-75	0.91	0.68	2500	2000	36	4.07	4.2	108.0	12.21	12.6	8.47	0.96	75	4.1	36.3	0.0059	0.000667
GMBF4340-100	0.64	0.48	1800	1400	36	4.07	3.2	108.0	12.21	9.6	11.41	1.29	101	7.0	41.2	0.0059	0.000667
GMBF4360-25	1.87	1.39	4000	3200	46	5.20	16.1	138.0	15.60	48.3	2.94	0.33	25	0.1	3.6	0.0086	0.000972
GMBF4360-50	1.87	1.39	4000	3200	46	5.20	8.0	138.0	15.60	24.0	5.76	0.65	51	1.0	11.9	0.0086	0.000972
GMBF4360-75	1.17	0.87	2500	2000	46	5.20	5.5	138.0	15.60	16.5	8.36	0.94	74	2.3	19.8	0.0086	0.000972
GMBF4360-100	0.82	0.61	1800	1400	46	5.20	4.1	138.0	15.60	12.3	11.30	1.28	100	3.9	28.7	0.0086	0.000972

NOTE: All ratings based on a 25°C ambient temperature with the motor face mounted to a 14" x 14" x 3/4" aluminum heatsink. The values for Max and Rated Speed are for motors operated with a 230 VAC power supply

CONNECTORS & PIN-OUT INFORMATION

5-Pin MS connector MS3112E14-5P		18-Pin MS connector MS3112E14-18P		19-Pin MS connector MS3112E14-19P		
 FRONT VIEW Straight Mating Connector, MS316F14-5S		 FRONT VIEW Straight Mating Connector, MS3116F14-18S		 FRONT VIEW Straight Mating Connector, MS3116F14-19S		
Pin#	Function	Pin#	Function	Pin#	Function	
			Resolver		Resolver	Encoder with Commutation Track
A	Phase R	A	Brake +	A	Temperature Switch	Temperature Switch
B	Phase S	B	Brake -	B	Temperature Switch	Temperature Switch
C	Phase T	C	Brake Shield	C	Resolver Shield	Encoder Shield
D	Case Ground	D	Resolver Shield	D	N/C	Encoder +5VDC
E	N/C	E	Reference	E	N/C	Encoder Common
Special mounting options are available. Please contact a Glentek Sales Engineer for detailed information.						
		F	Since Ground	F	Sine Ground	Channel A+
		G	Cosine Ground	G	Sine +	Channel A-
		H	Sine	H	Cosine Ground	Channel B+
		J	N/C	J	Cosine +	Channel B-
		K	N/C	K	Reference Ground	Channel Z+
		L	N/C	L	Reference	Channel Z-
		M	N/C	M	N/C	Comm. Track S1+
		N	Temperature Switch	N	N/C	Comm. Track S1-
		P	N/C	P	N/C	Comm. Track S2+
		R	Reference Ground	R	N/C	Comm. Track S2-
		S	Cosine	S	N/C	Comm. Track S3+
		T	N/C	T	N/C	Comm. Track S3-
		U	Temperature Switch	U	Brake +	Brake +
		V		V	Brake -	Brake -

GMBF4300 SERIES BRAKE OPTION

Motor Frame Size	Extension	Torque		Power	Current	Resistance	Inductance
	in. (mm)	Lb-in	Nm	Watts	A	Ω	mH
GMBF4300	1.46 (37)	80	9	18	0.8	33	115

Note:


Brakes are optional. All brakes require 24 VDC input voltage. The values for “Extension” represent the nominal maximum length that the brake will add to the motor. For some models, the extension will be less. Please contact one of our sales engineers for the exact values.

SHAFT LOAD RATINGS

Motor Frame Size	Radial Shaft Load		Axial Shaft Load	
	Lbs	N	Lbs	N
GMBF4300	70	310	25	110

Note: This table is for general guidance only. Shaft load ratings are approximations and will vary with shaft diameter, the location of the load on the shaft, speed (RPM), bearings, and more. The values in the table are for a load located 1" (25.4 mm) from the mounting face of the motor and at 3000 RPM.

GMBF4300 SERIES DIMENSIONS

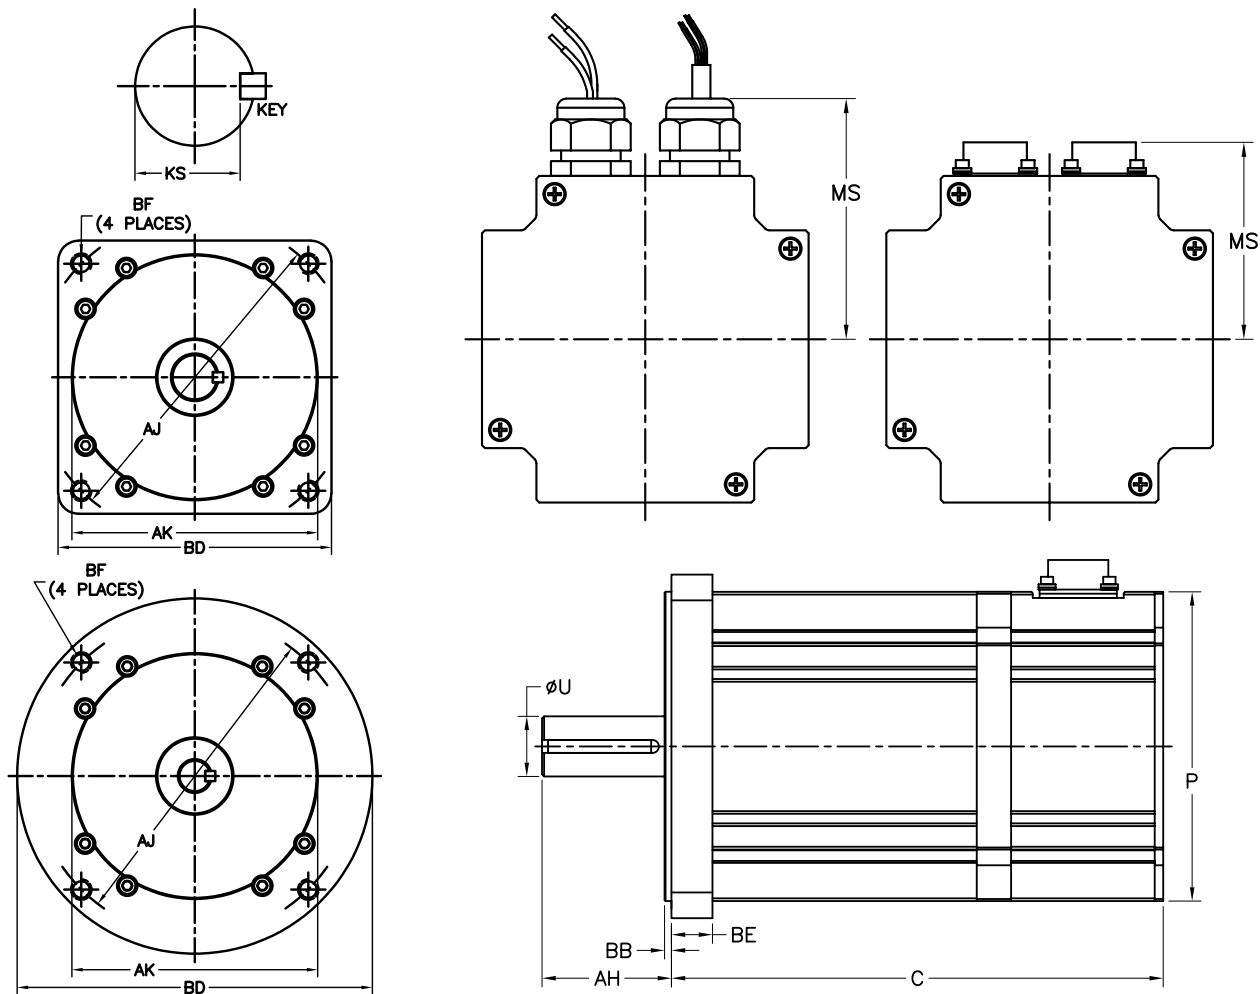

Model Number	Kg (lbs.)	C (max)	P (max)	Shaft				Flange/Face				Mounting Hole		
				AH	U	KEY	KS	AK	BB	BD	BE	AJ	BF Dia.	Tap
GMBF4320-XXX-M	4.1 (9.0)	201.7 (7.9)	108.0 (4.25)	50.00 (1.97)	19.00 (0.748)	M6 SQ. X 40	15.4 - 15.5	110.00 (4.331)	3.00 (0.12)	114.30 (4.50)	14.7 (0.58)	130.00 (5.118)	9.19 (0.362)	THRU
GMBF4340-XXX-M	6.3 (13.9)	254.0 (10.0)	108.0 (4.25)	50.00 (1.97)	19.00 (0.748)	M6 SQ. X 40	15.4 - 15.5	110.00 (4.331)	3.00 (0.12)	114.30 (4.50)	14.7 (0.58)	130.00 (5.118)	9.19 (0.362)	THRU
GMBF4360-XXX-M	8.5 (18.7)	306.3 (12.1)	108.0 (4.25)	50.00 (1.97)	19.00 (0.748)	M6 SQ. X 40	15.4 - 15.5	110.00 (4.331)	3.00 (0.12)	114.30 (4.50)	14.7 (0.58)	130.00 (5.118)	9.19 (0.362)	THRU

Note: Dimensions are in **mm** (inches)


Model Number	Lbs. (Kg)	C (max)	P (max)	Shaft				Flange/Face				Mounting Hole		
				AH	U	KEY	KS	AK	BB	BD	BE	AJ	BF Dia.	Tap
GMBF4320-XXX-E	9.0 (4.1)	7.94 (201.7)	4.25 (108.0)	1.88 (47.8)	0.6250 (15.88)	.188 SQ. X 1.50	.507 - .517	4.500 (114.30)	0.10 (2.54)	5.00 (127.0)	0.60 (15.24)	5.875 (149.23)		3/8-16 THRU
GMBF4340-XXX-E	13.9 (6.3)	10.00 (254.0)	4.25 (108.0)	1.88 (47.8)	0.6250 (15.88)	.188 SQ. X 1.50	.507 - .517	4.500 (114.30)	0.10 (2.54)	5.00 (127.0)	0.60 (15.24)	5.875 (149.23)		3/8-16 THRU
GMBF4360-XXX-E	18.7 (8.5)	12.06 (306.3)	4.25 (108.0)	1.88 (47.8)	0.6250 (15.88)	.188 SQ. X 1.50	.507 - .517	4.500 (114.30)	0.10 (2.54)	5.00 (127.0)	0.60 (15.24)	5.875 (149.23)		3/8-16 THRU
NEMA 42				1.32 (33.5)	0.6250 (15.88)	.188 SQ. X 1.00	.507 - .517	2.188 (55.58)	0.10 (2.54)	4.50 (114.3)	0.60 (15.24)	4.950 (125.73)	0.300 (7.62)	THRU
NEMA 56C				2.06 (52.3)	0.6250 (15.88)	.188 SQ. X 1.50	.507 - .517	4.500 (114.30)	0.12 (3.05)	6.50 (165.1)	0.61 (15.49)	5.875 (149.23)		3/8-16 THRU

Note: Dimensions are in **inches** (mm)

Connectors	5-Pin	18-Pin	19-Pin	Strain Relief
MS	2.59	2.59	2.59	3.19
inches (mm)	(65.7)	(65.7)	(65.7)	(81.1)
MS	65.7	65.7	65.7	81.1
mm (inches)	(2.59)	(2.59)	(2.59)	(3.19)

GMBF4320-25 PERFORMANCE DATA


GMBF4320-25	SYMBOL
120 OR 230 VAC	—

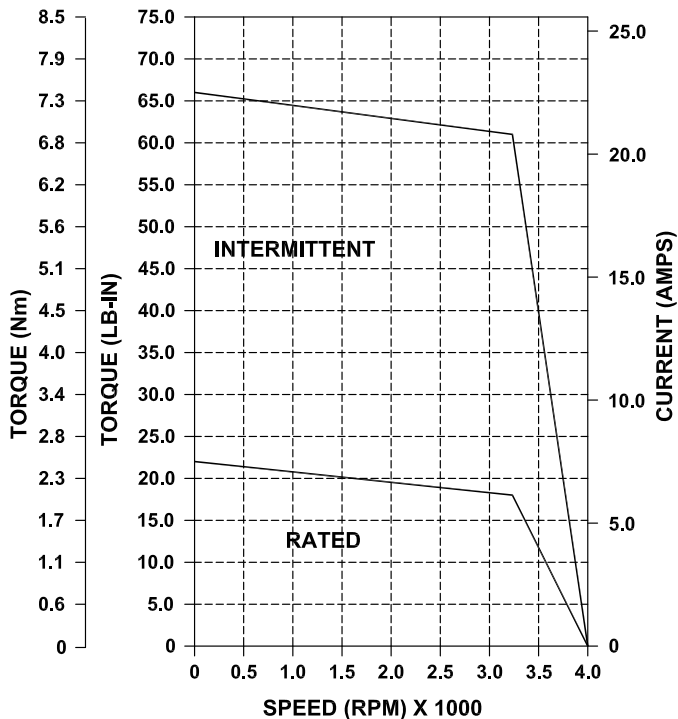

Power @ Rated Speed	HP	0.89
	KW	0.67
Speed, RPM	Max.	4000
	Rated	3200
Cont. Stall Rating	Lb-in	22
	Nm	2.49
	Amps	7.5
Peak Stall Rating	Lb-in	66.0
	Nm	7.47
	Amps	22.5
Torque Constant	Lb-in/A	2.94
	Nm/A	0.33
Back EMF	V/Krpm	26
Resistance	Ohms	1.1
Inductance	mH	8.4
Armature Inertia	Lb-in-sec²	0.0032
	Kg-m²	0.000362

GMBF4320-50 PERFORMANCE DATA


GMBF4320-50	SYMBOL
120 VAC	—
230 VAC	- - - -

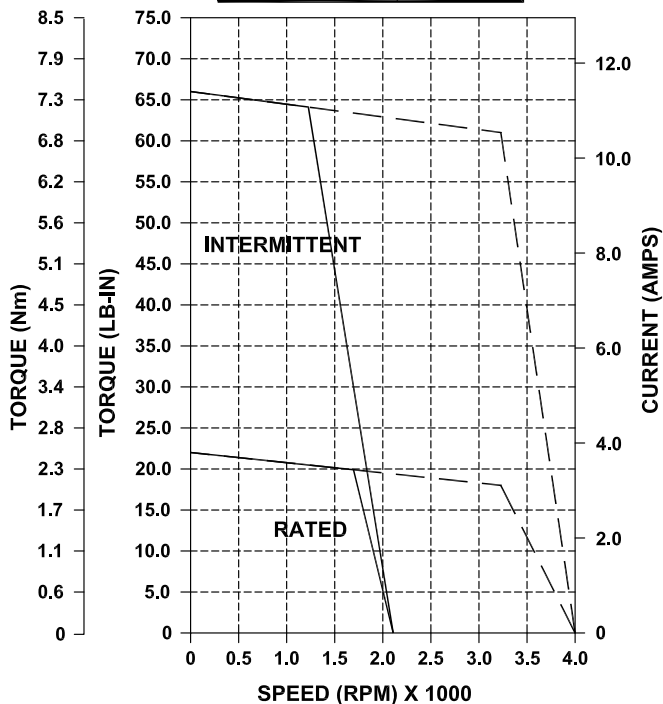

Power @ Rated Speed	HP	0.89
	KW	0.67
Speed, RPM	Max.	4000
	Rated	3200
Cont. Stall Rating	Lb-in	22
	Nm	2.49
	Amps	3.8
Peak Stall Rating	Lb-in	66.0
	Nm	7.47
	Amps	11.4
Torque Constant	Lb-in/A	5.76
	Nm/A	0.65
Back EMF	V/Krpm	51
Resistance	Ohms	4.7
Inductance	mH	14.7
Armature Inertia	Lb-in-sec²	0.0032
	Kg-m²	0.000362


NOTE: All ratings based on a 25°C ambient temperature with the motor face mounted to a 14" x 14" x 3/4" aluminum heatsink.

GMBF4320-75 PERFORMANCE DATA

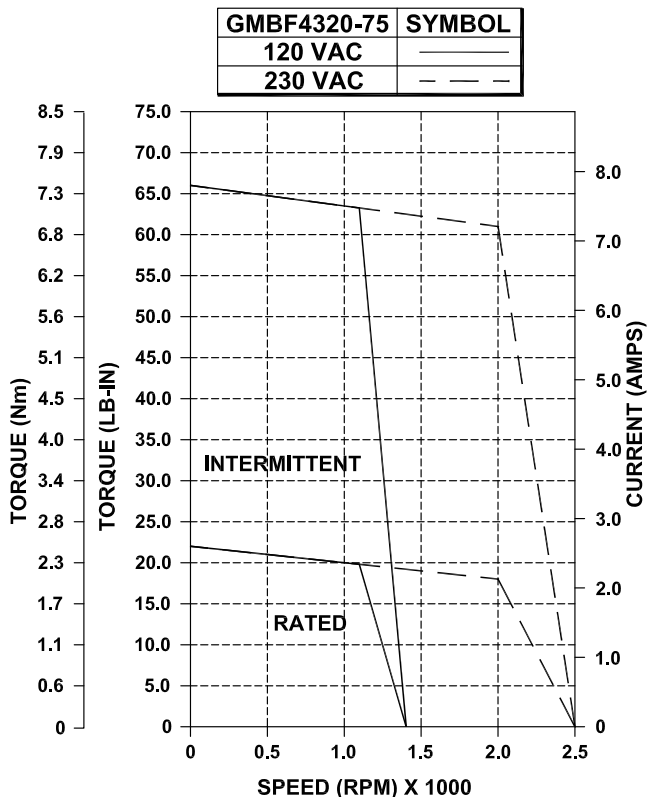

Power @ Rated Speed	HP	0.56
	KW	0.42
Speed, RPM	Max.	2500
	Rated	2000
Cont. Stall Rating	Lb-in	22
	Nm	2.49
	Amps	2.6
Peak Stall Rating	Lb-in	66.0
	Nm	7.47
	Amps	7.8
Torque Constant	Lb-in/A	8.47
	Nm/A	0.96
Back EMF	V/Krpm	75
Resistance	Ohms	11.0
Inductance	mH	39.5
Armature Inertia	Lb-in-sec ²	0.0032
	Kg-m ²	0.000362


GMBF4320-100 PERFORMANCE DATA

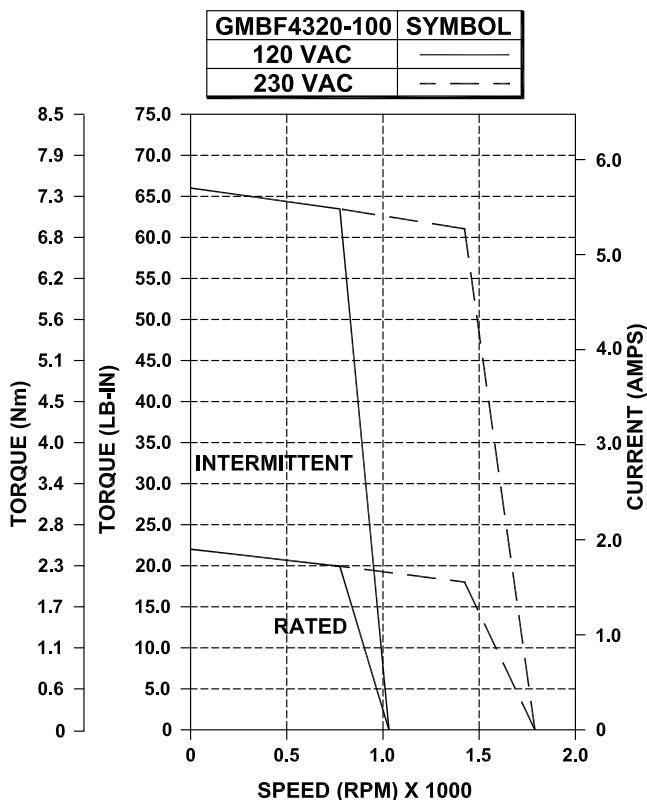

Power @ Rated Speed	HP	0.39
	KW	0.29
Speed, RPM	Max.	1800
	Rated	1400
Cont. Stall Rating	Lb-in	22
	Nm	2.49
	Amps	1.9
Peak Stall Rating	Lb-in	66.0
	Nm	7.47
	Amps	5.7
Torque Constant	Lb-in/A	11.41
	Nm/A	1.29
Back EMF	V/Krpm	101
Resistance	Ohms	18.5
Inductance	mH	43.8
Armature Inertia	Lb-in-sec ²	0.0032
	Kg-m ²	0.000362


NOTE: All ratings based on a 25°C ambient temperature with the motor face mounted to a 14" x 14" x 3/4" aluminum heatsink.

GMBF4340-25 PERFORMANCE DATA

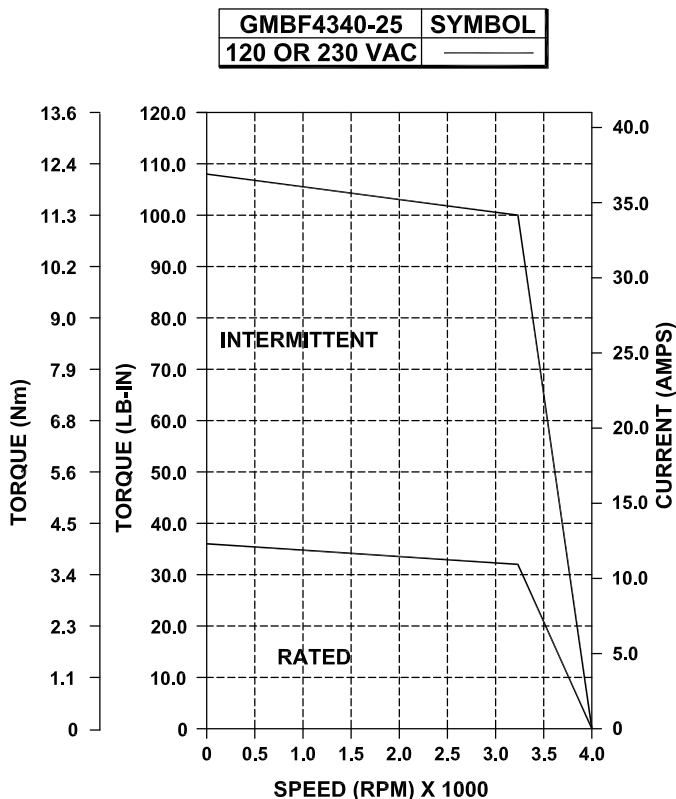

Power @ Rated Speed	HP	1.46
	KW	1.09
Speed, RPM	Max.	4000
	Rated	3200
Cont. Stall Rating	Lb-in	36
	Nm	4.07
	Amps	12.3
Peak Stall Rating	Lb-in	108.0
	Nm	12.21
	Amps	36.9
Torque Constant	Lb-in/A	2.94
	Nm/A	0.33
Back EMF	V/Krpm	26
Resistance	Ohms	0.4
Inductance	mH	5.2
Armature Inertia	Lb-in-sec²	0.0059
	Kg-m²	0.000667


GMBF4340-50 PERFORMANCE DATA

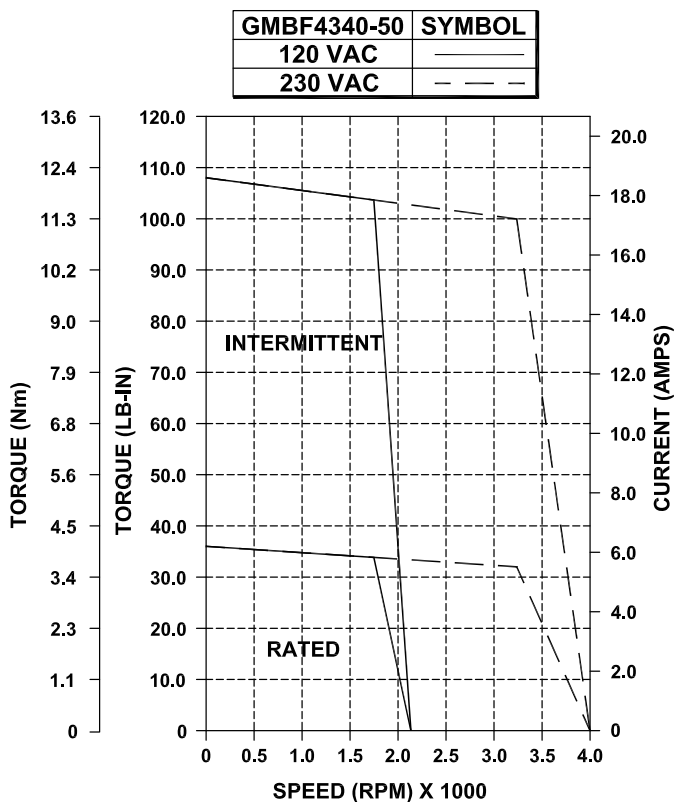

Power @ Rated Speed	HP	1.46
	KW	1.09
Speed, RPM	Max.	4000
	Rated	3200
Cont. Stall Rating	Lb-in	36
	Nm	4.07
	Amps	6.2
Peak Stall Rating	Lb-in	108.0
	Nm	12.21
	Amps	18.6
Torque Constant	Lb-in/A	5.76
	Nm/A	0.65
Back EMF	V/Krpm	51
Resistance	Ohms	2.1
Inductance	mH	14
Armature Inertia	Lb-in-sec²	0.0059
	Kg-m²	0.000667


NOTE: All ratings based on a 25°C ambient temperature with the motor face mounted to a 14" x 14" x 3/4" aluminum heatsink.

GMBF4340-75 PERFORMANCE DATA

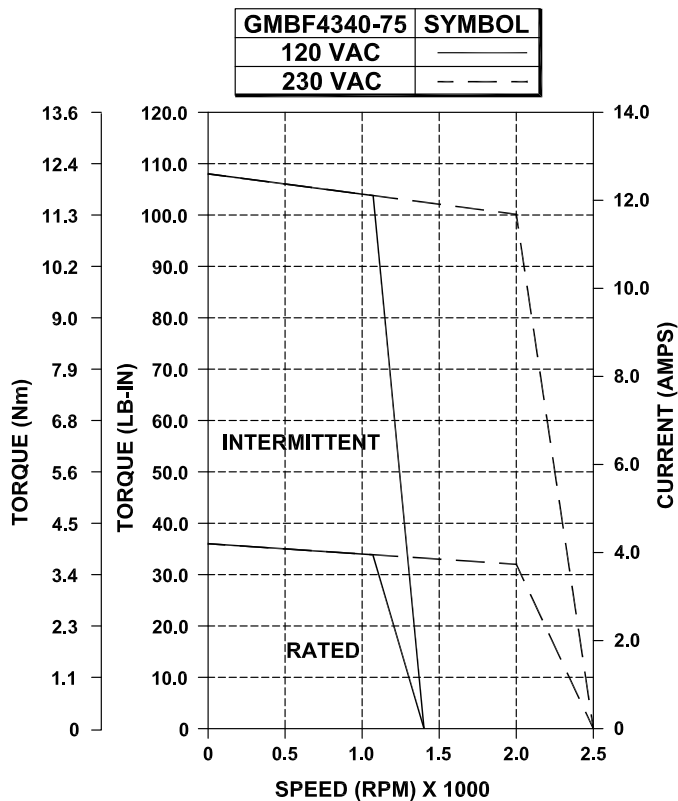

Power @ Rated Speed	HP	0.91
	KW	0.68
Speed, RPM	Max.	2500
	Rated	2000
Cont. Stall Rating	Lb-in	36
	Nm	4.07
	Amps	4.2
Peak Stall Rating	Lb-in	108.0
	Nm	12.21
	Amps	12.6
Torque Constant	Lb-in/A	8.47
	Nm/A	0.96
Back EMF	V/Krpm	75
Resistance	Ohms	4.1
Inductance	mH	36.3
Armature Inertia	Lb-in-sec²	0.0059
	Kg-m²	0.000667


GMBF4340-100 PERFORMANCE DATA

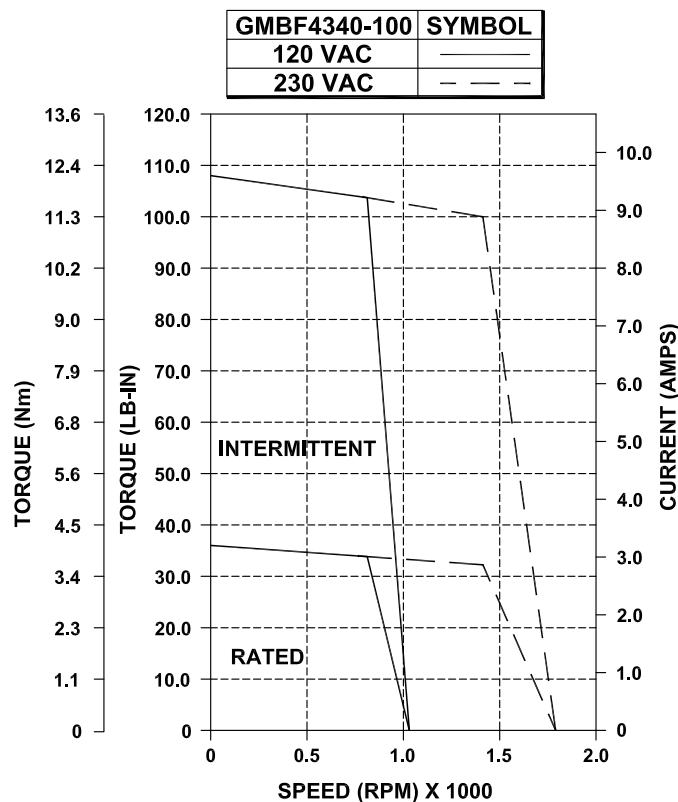

Power @ Rated Speed	HP	0.64
	KW	0.48
Speed, RPM	Max.	1800
	Rated	1400
Cont. Stall Rating	Lb-in	36
	Nm	4.07
	Amps	3.2
Peak Stall Rating	Lb-in	108.0
	Nm	12.21
	Amps	9.6
Torque Constant	Lb-in/A	11.41
	Nm/A	1.29
Back EMF	V/Krpm	101
Resistance	Ohms	7.0
Inductance	mH	41.2
Armature Inertia	Lb-in-sec²	0.0059
	Kg-m²	0.000667


NOTE: All ratings based on a 25°C ambient temperature with the motor face mounted to a 14" x 14" x 3/4" aluminum heatsink.

GMBF4360-25 PERFORMANCE DATA

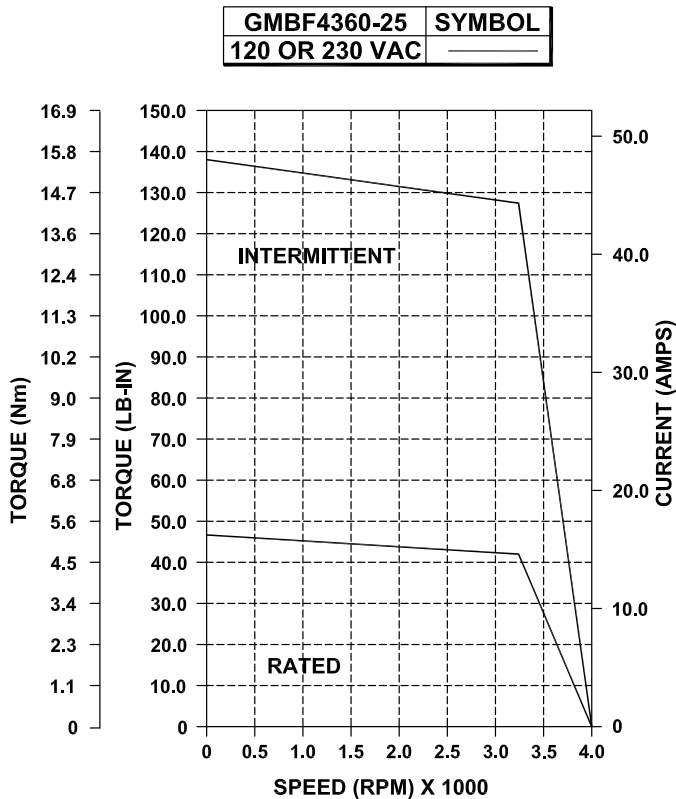

Power @ Rated Speed	HP	1.87
	KW	1.39
Speed, RPM	Max.	4000
	Rated	3200
Cont. Stall Rating	Lb-in	46
	Nm	5.20
	Amps	16.1
Peak Stall Rating	Lb-in	138.0
	Nm	15.60
	Amps	48.3
Torque Constant	Lb-in/A	2.94
	Nm/A	0.33
Back EMF	V/Krpm	25
Resistance	Ohms	0.1
Inductance	mH	3.6
Armature Inertia	Lb-in-sec²	0.0086
	Kg-m²	0.000972


GMBF4360-50 PERFORMANCE DATA

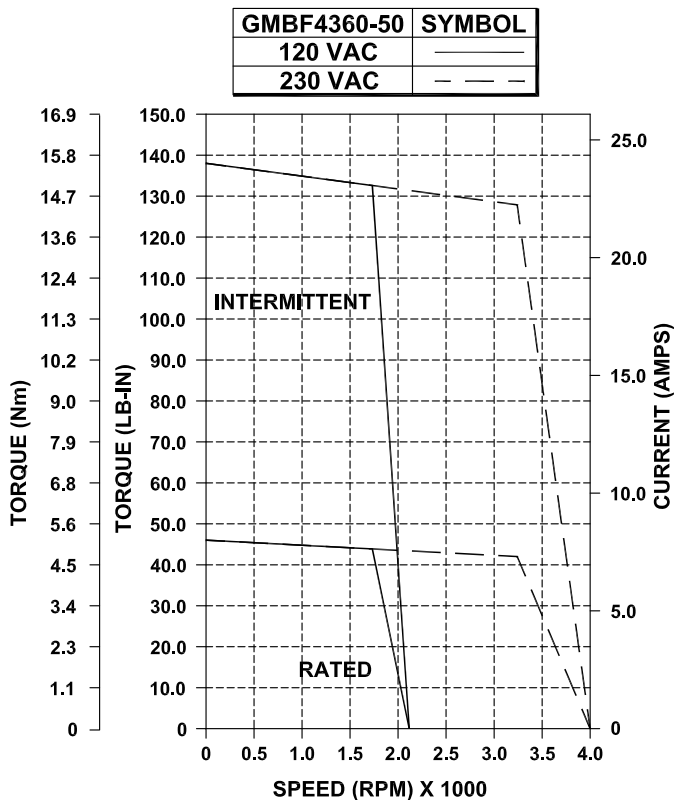

Power @ Rated Speed	HP	1.87
	KW	1.39
Speed, RPM	Max.	4000
	Rated	3200
Cont. Stall Rating	Lb-in	46
	Nm	5.20
	Amps	8.0
Peak Stall Rating	Lb-in	138.0
	Nm	15.60
	Amps	24.0
Torque Constant	Lb-in/A	5.76
	Nm/A	0.65
Back EMF	V/Krpm	51
Resistance	Ohms	1.0
Inductance	mH	11.9
Armature Inertia	Lb-in-sec²	0.0086
	Kg-m²	0.000972


NOTE: All ratings based on a 25°C ambient temperature with the motor face mounted to a 14" x 14" x 3/4" aluminum heatsink.

GMBF4360-75 PERFORMANCE DATA

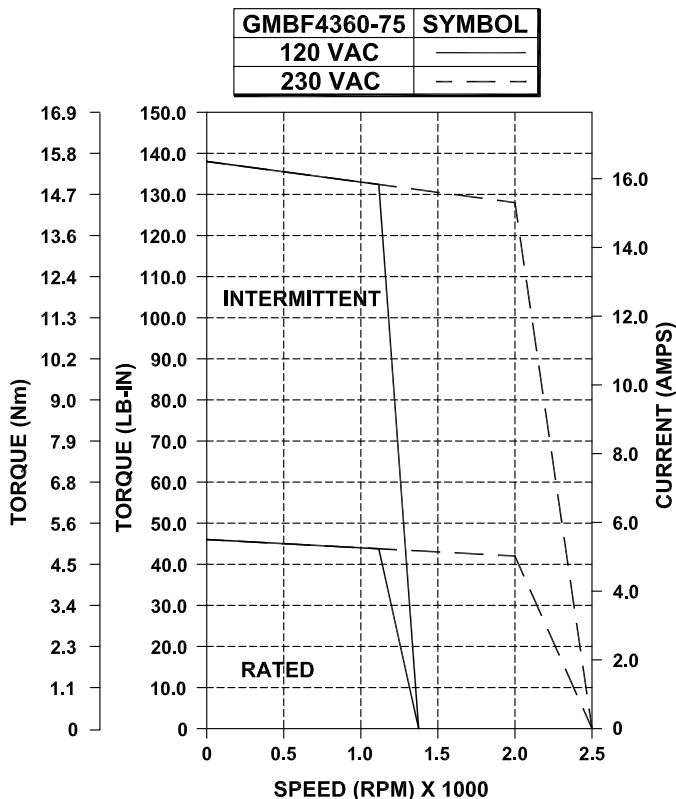

Power @ Rated Speed	HP	1.17
	KW	0.87
Speed, RPM	Max.	2500
	Rated	2000
Cont. Stall Rating	Lb-in	46
	Nm	5.20
	Amps	5.5
Peak Stall Rating	Lb-in	138.0
	Nm	15.60
	Amps	16.5
Torque Constant	Lb-in/A	8.36
	Nm/A	0.94
Back EMF	V/Krpm	74
Resistance	Ohms	2.3
Inductance	mH	19.8
Armature Inertia	Lb-in-sec²	0.0086
	Kg-m²	0.000972

GMBF4360-100 PERFORMANCE DATA

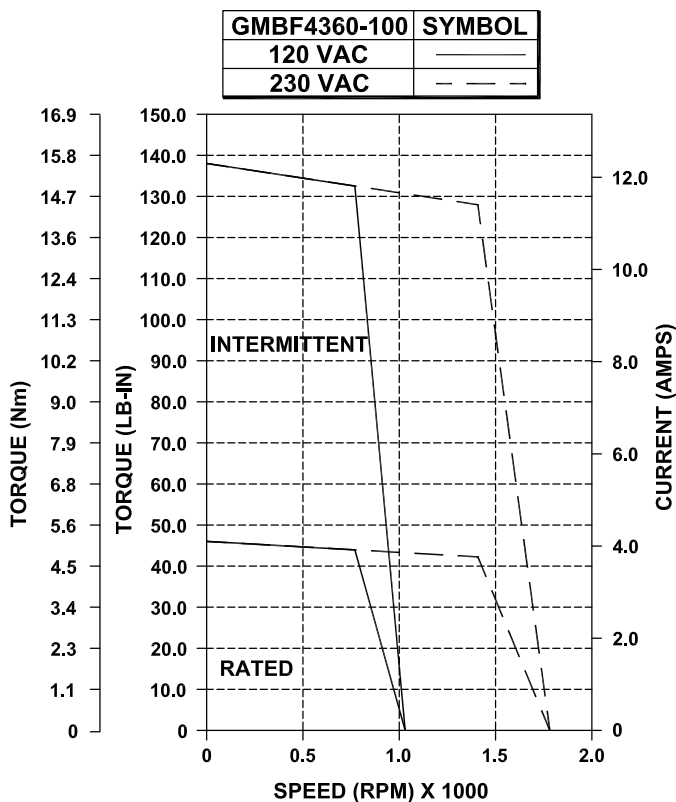

Power @ Rated Speed	HP	0.82
	KW	0.61
Speed, RPM	Max.	1800
	Rated	1400
Cont. Stall Rating	Lb-in	46
	Nm	5.20
	Amps	4.1
Peak Stall Rating	Lb-in	138.0
	Nm	15.60
	Amps	12.3
Torque Constant	Lb-in/A	11.30
	Nm/A	1.28
Back EMF	V/Krpm	100
Resistance	Ohms	3.9
Inductance	mH	28.7
Armature Inertia	Lb-in-sec²	0.0086
	Kg-m²	0.000972

NOTE: All ratings based on a 25°C ambient temperature with the motor face mounted to a 14" x 14" x 3/4" aluminum heatsink.

