


GLENTEK GMB2000 BRUSHLESS SERVO MOTOR DIMENSIONS

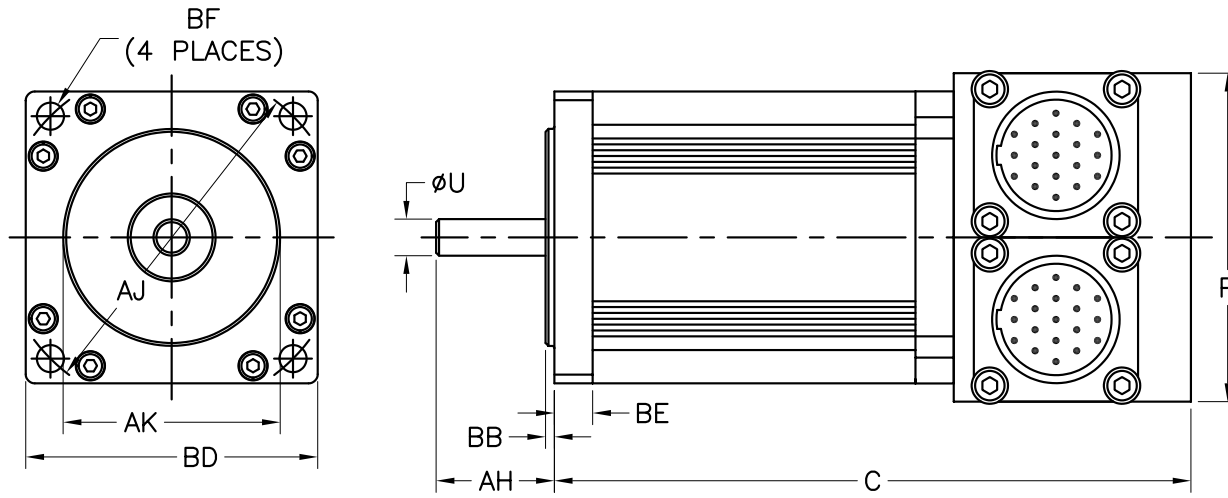

	Model Number	Kg (lbs.)	C (max)	P (max)	Shaft				Flange/Face				Mounting Hole		
					AH	U	KEY	KS	AK	BB	BD	BE	AJ	BF Ø	Tap
METRIC - mm (inches)	GMB2005-XXX-M	0.7 (1.5)	99.6 (3.9)	57.2 (2.25)	30.00 (1.18)	14.00 (0.551)	M5 SQ. X 20	10.9 - 11.0	50.00 (1.969)	2.50 (0.10)	60.0 (2.36)	7.1 (0.28)	70.00 (2.756)	4.50 (0.177)	THRU
	GMB2010-XXX-M	0.9 (2.0)	110.7 (4.4)	57.2 (2.25)	30.00 (1.18)	14.00 (0.551)	M5 SQ. X 20	10.9 - 11.0	50.00 (1.969)	2.50 (0.10)	60.0 (2.36)	7.1 (0.28)	70.00 (2.756)	4.50 (0.177)	THRU
	GMB2015-XXX-M	1.1 (2.4)	123.4 (4.9)	57.2 (2.25)	30.00 (1.18)	14.00 (0.551)	M5 SQ. X 20	10.9 - 11.0	50.00 (1.969)	2.50 (0.10)	60.0 (2.36)	7.1 (0.28)	70.00 (2.756)	4.50 (0.177)	THRU
	GMB2020-XXX-M	1.4 (3.1)	146.0 (5.7)	57.2 (2.25)	30.00 (1.18)	14.00 (0.551)	M5 SQ. X 20	10.9 - 11.0	50.00 (1.969)	2.50 (0.10)	60.0 (2.36)	7.1 (0.28)	70.00 (2.756)	4.50 (0.177)	THRU
ENGLISH - inches (mm)	GMB2005-XXX-E	1.5 (0.7)	3.92 (99.57)	2.25 (57.2)	0.81 (20.6)	0.3750 (9.53)			1.500 (38.10)	0.06 (1.52)	2.25 (57.15)	0.26 (6.60)	2.625 (66.68)	0.200 (5.08)	THRU
	GMB2010-XXX-E	2.0 (0.9)	4.36 (110.74)	2.25 (57.2)	0.81 (20.6)	0.3750 (9.53)			1.500 (38.10)	0.06 (1.52)	2.25 (57.15)	0.26 (6.60)	2.625 (66.68)	0.200 (5.08)	THRU
	GMB2015-XXX-E	2.5 (1.1)	4.86 (123.44)	2.25 (57.2)	0.81 (20.6)	0.3750 (9.53)			1.500 (38.10)	0.06 (1.52)	2.25 (57.15)	0.26 (6.60)	2.625 (66.68)	0.200 (5.08)	THRU
	GMB2020-XXX-E	3.1 (1.4)	5.75 (146.05)	2.25 (57.2)	0.81 (20.6)	0.3750 (9.53)			1.500 (38.10)	0.06 (1.52)	2.25 (57.15)	0.26 (6.60)	2.625 (66.68)	0.200 (5.08)	THRU
	NEMA 23				0.81 (20.6)	0.2500 (6.35)			1.500 (38.10)	0.06 (1.52)	2.25 (57.15)	0.30 (7.62)	2.625 (66.68)	0.200 (5.08)	THRU

NOTE: Metric and English motors are different models with differing dimensions.